



ALKALINE DETERGENT

SW4150

Spray Wash Detergent for Polycarbonate Lenses

VALTRON SW4150 is an alkaline detergent formulated for use in in-line spray applications to clean ophthalmic lenses and polycarbonate substrates. A combination of surfactants allows for complete removal of fingerprints and process contamination.

UNIQUE FEATURES


- Aggressive Cleaning with No Compatibility Issues
- Designed for In-line & Cabinet Spray Cleaning Applications
- Safe on Coated & Uncoated Polycarbonate Materials
- Combination of Low Foaming Surfactants Ensures Efficient Machine Operation
- Excellent Rinsability
- Removes Fingerprints, Dust & Processing Contamination

APPLICATION

VALTRON SW4150 is formulated for in-line pressure spray equipment, ultrasonic and mechanical scrub applications. Dilution rates are 1.0% - 10% by volume with 3.0% to 5.0% being typical. SW4150 detergent can be used at temperatures of 120°F to 150°F (49°C to 65.5°C).

PACKAGING

VALTRON SW4150 detergent is available in 5 gallon (18.9 L) pails and 55 gallon (208 L) drums.

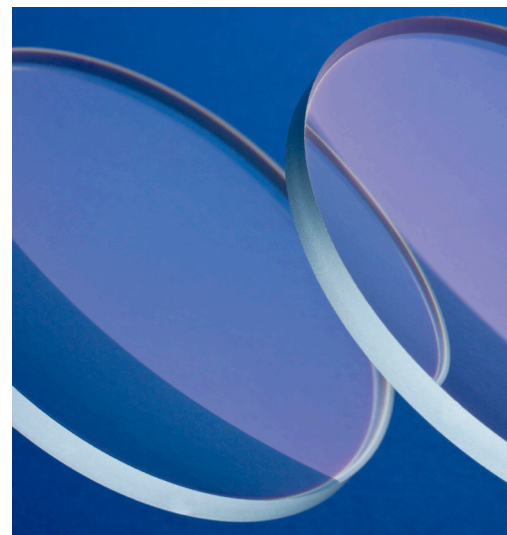

TYPICAL PHYSICAL PROPERTIES

Appearance	Clear liquid
Specific Gravity 60°F (15.6°C)	1.07
pH (concentrate)	11.6
Cloud Point (1.0% solution, v/v)	Cloudy at room temperature
Surface Tension (1.0% solution, v/v)	27.7 dynes/cm



2113 Sanatoga Station Road, Pottstown, PA 19464 USA
Phone: 610-705-5900 • Fax: 610-705-0300
For technical service call or e-mail: technicalservices@valtechcorp.com
www.valtechcorp.com

CERTIFIED
ISO 9001 : 2008
REACH EC 1907/2007

VALTRON®
is a registered trademark of
Valtech Corporation

Information herein is accurate to the best of our knowledge. Suggestions are made without warranty or guarantee of results. Before using, user should determine the suitability of the product for its intended use and user assumes the risk and liability in connection therewith. We do not suggest violation of any existing patents or give permission to practice any patented invention without a license.

